

FootFall 5mm Acoustical Floor Underlayment

FootFall floor underlayment is made from recycled rubber tires. FootFall 5 is used under tile/marble, carpet and wood flooring. FootFall is excellent for use in lightweight wood frame construction due to its weight & mass. FootFall 5 is 3/16" thick and comes in rolls 4' x 25' (100 sq ft rolls)

Applications:

Typical uses include; apartments, homes, condos, schools, hospitals and any areas where reduction from structural impact noise through the floor to ceiling assembly is required. FootFall underlayment can be installed over concrete, gypsum topping and structural sound plywood sub floors.



- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 25' rolls
- Sound control underlay for tile, stone, & Hardwood

Product Data:


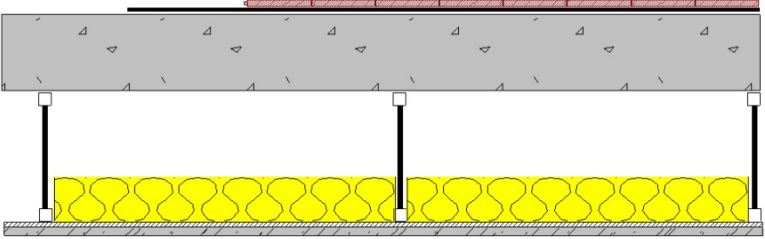
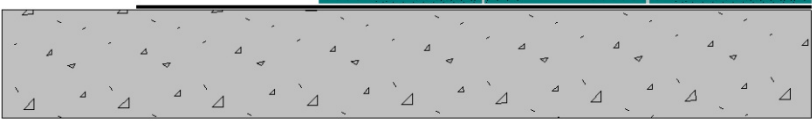

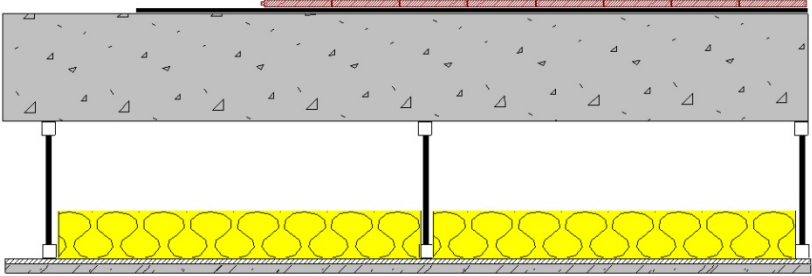
Description Made from 92% recycled SBR (Styrene-Butadiene Rubber) tire rubber

| | |
|-----------------------------------|-----------------|
| Nominal thickness | 5mm |
| Density (ASTM D-792) | 43 lbs cubic ft |
| Standard width | 48" wide |
| Roll length | 25' long |
| Weight | .80 lb psf |
| Hardness A Shore-Durometer | 40-55 |



Acoustics performance on back page

ANC FootFall 5mm Acoustical Testing

| Description | Detail | IIC / FIC Rating |
|--|--|-----------------------------|
| <p>5mm ANC FootFall Glue down Engineered hardwood over 5mm FootFall over 6" slab</p> |  | <p>Δ 21 / IIC 51</p> |
| <p>5mm ANC FootFall Glue down Engineered hardwood over 5mm FootFall over 6" slab with a ceiling below</p> |  | <p>IIC 71</p> |
| <p>5mm ANC FootFall 6" x 6" x 1/2" unglazed quarry tile bonded with thin set to 5mm FootFall glued to 8" slab</p> |  | <p>IIC 52</p> |
| <p>5mm ANC FootFall Glue down Engineered hardwood over 5mm FootFall over 8" slab</p> |  | <p>IIC 53</p> |
| <p>5mm ANC FootFall Glue down Engineered hardwood over 5mm FootFall over 8" slab with a ceiling below</p> |  | <p>IIC 72</p> |